


# Mould Holder

By ST Machining, LLC

## Mould Holder Instructions

**Caution**, due to the leverage and fast action of the holder, close the mould slowly and carefully or damage to the mould can result.

**TIPS:** Tilt the holder down before closing and both parts of the mould will swing down and align easily. If held horizontally, one half may be slightly out of alignment with the other. Only adjust closing pressure tight enough to firmly hold the mould. This is **NOT** a “vise grip” and extreme pressure is NOT needed or wanted.

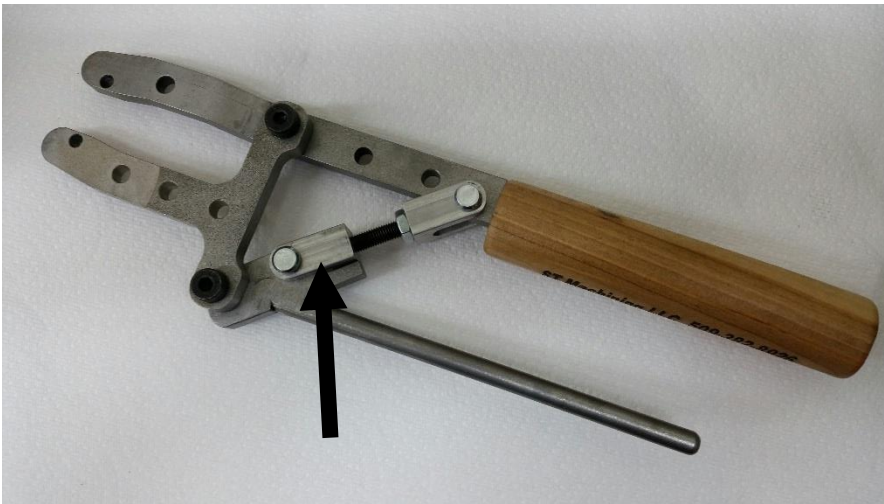

Adjustment of closing pressure is made with the clevis farthest from the wooden handle. Remove the pin and turn the clevis counter clockwise to increase pressure. Reinsert the pin and test the hold of the mould. It should close firmly and hold.

Readjustment may be needed after some use, as parts “wear in.”

Remember, the object is just to hold the mould closed firmly and consistently. This will give you better bullet quality.

For help or information contact:

**ST Machining, LLC**

2 Port Way

Dayton, WA 99328

Phone: 509-382-8926

Email: [sales@stmachining.us](mailto:sales@stmachining.us) ← NOTE the .us – rather than .com!

Web page: [www.stmachining.us](http://www.stmachining.us)